


V Series

Standard Duty Grade 2 Lever Lock

(Non Thru Bolted)

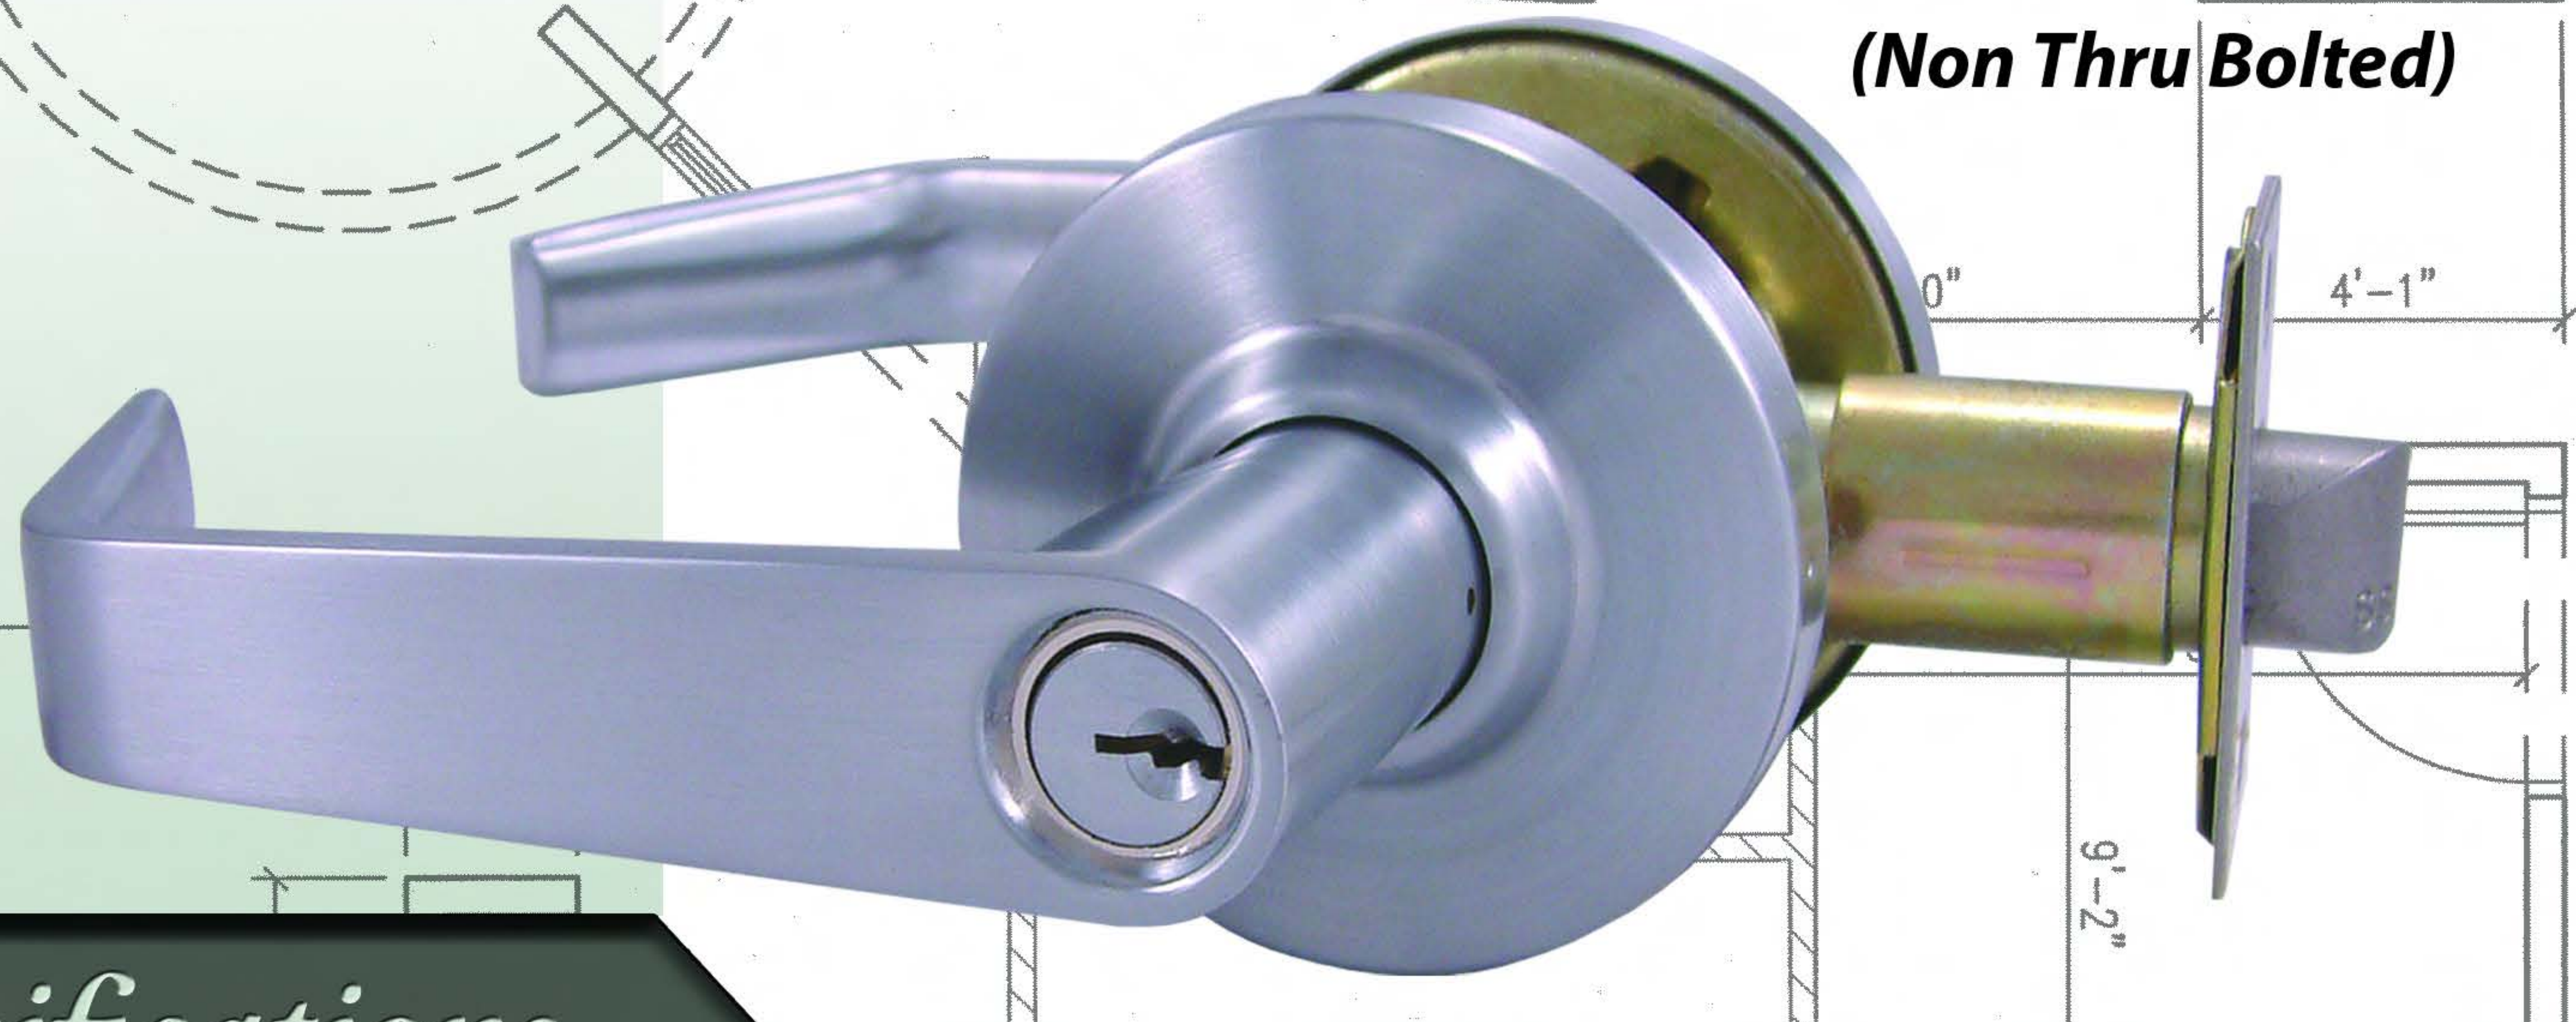

Specifications

ANSI: Meets & Exceeds ANSI - A156.2, Series 4000, Grade 2 Standards

UL Listings: UL Listed for "A" Label 3 Hour Fire Doors

ADA Compliance: Meets ADA and ANSI A117.1 accessibility codes

Lock Chassis: Steel, Zinc dichromated for Corrosion Resistance

Clutching: Clutching levers standard for Vandal resistance on locking functions

Trim: 5" Solid zinc diecast levers, 3" wrought brass roses (will not cover thru bolt holes)

Lever Return: Anti-sag mechanism with independent lever return springs to prevent lever sag

Handing: Non-Handed - Completely reversible (S-A & S-B lever styles are handed)

Backset & Latchface: 2 3/4" backset std. with 1 1/8" x 2 1/4" latchface, 2 3/8" backset is available with 1" x 2 1/4" latchface both with self adjusting front for square or beveled edge doors

Latchbolt: Stainless Steel with 1/2" projection, Deadlocking on keyed functions

Cylinder Options: 6 Pin Solid Brass, C Keyway, 2 Silver Nickel Keys standard

Optional Keyways: 11 popular competitor keyways available with replacement cylinders (extra charge applies)

Note: Replacement cylinders are supplied loose and not installed in locksets

Strikes: 4 7/8" x 1 1/4" ASA (standard) - 2 3/4" T strike & Full lip strike w/ 1/4" R.C available

Door Preparation: ANSI A115.2 - 2 1/8" crossbore

Door Thickness: Factory Set for 1 3/4", can be adjusted to fit 1 3/8" to 2" thick doors

Standard Lever Design: Flat (standard - stocked in US26D and US10B) - Curved (stocked in US26D)

Other Lever Choices: Curved, Half Curved, S-A & S-B levers available in Lever Kits for stock finishes

Standard Finishes: US26D & US10B (in stock in Flat lever) - US26D (in stock in Curved lever)

Special Order Finishes: US3 PVD*, US4, US15, US26 PVD* (PVD = Lifetime Finish)

Fasteners: Combination screws for wood or metal doors & frames

Warranty: Limited Lifetime Warranty



211 Endeavor Drive - PO Box 680

Rogersville, MO 65742

PH 877-258-1262 FX 877-888-0150

www.designhardware.net