

X Series Functions & Options



Available Lever Styles



Flat Lever

Stocked in 6 Finishes



Curved Lever

Stocked in US26D
Lever Kits for other finishes



Half Curve Lever

Stocked in US26D
Lever Kits for other finishes



S-A Lever


Available with Lever Kits



S-B Lever

Available with Lever Kits

Outside / Inside	Series/ Function	Type	ANSI No.	Function Description
	X-61	Connecting Room/Exit Latch	F61	Deadlatching latchbolt from inside only. Blank plate outside.
	X-75	Passage	F75	Latchbolt operated by lever from either side at all times
	X-76	Privacy	F76	Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside, rotating inside lever or closing door.
	X-82 X-82IC	Entry/Office	F82	Turn / Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned Deadlocking latchbolt operated by inside lever at all times.
	X-84 X-84IC	Classroom	F84	Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside with key. When outside lever is locked, latchbolt is operated by key in outside lever or by rotating inside lever.
	X-86 X-86IC	Storeroom	F86	Deadlocking latchbolt operated by key in outside lever or rotating inside lever. Outside lever is always locked.
	X-SD	Single Dummy /		Single dummy trim for one side of door. Lever rigid
	X-DD	Double Dummy		Double dummy trim for both sides of the door. Levers rigid

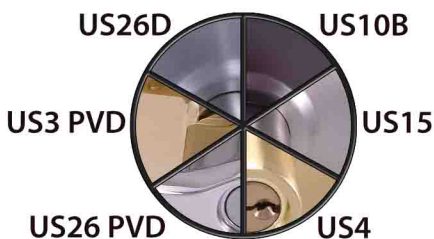

Stock Finishes

US3*	Bright/Polished Brass * PVD
US4	Brushed/Satin Brass
US10B	Oil Rubbed Bronze
US26*	Bright/Polished Chrome *PVD
US26D	Brushed/Satin Chrome
US15	Brushed/Satin Nickel

Special Order Finishes**

US5	Antique Brass
-----	---------------

**Special order finishes require 12 week leadtime

*PVD Lifetime Finish Standard on US3 and US26 finishes.
PVD = Physical Vapor Deposition

How to Order

Series Function Lever Design Finish Handing (if required)

X — 82 — F — US26D — RH

Note: Non stock levers are available with Lever Kits.
S-A and S-B levers are handed please specify right or left hand.

Lever Abbreviations

Flat= F
Curved = C
Half Curve = H
S-A = S-A
S-B = S-B