



D1 Series

Tubular Deadbolt Lock

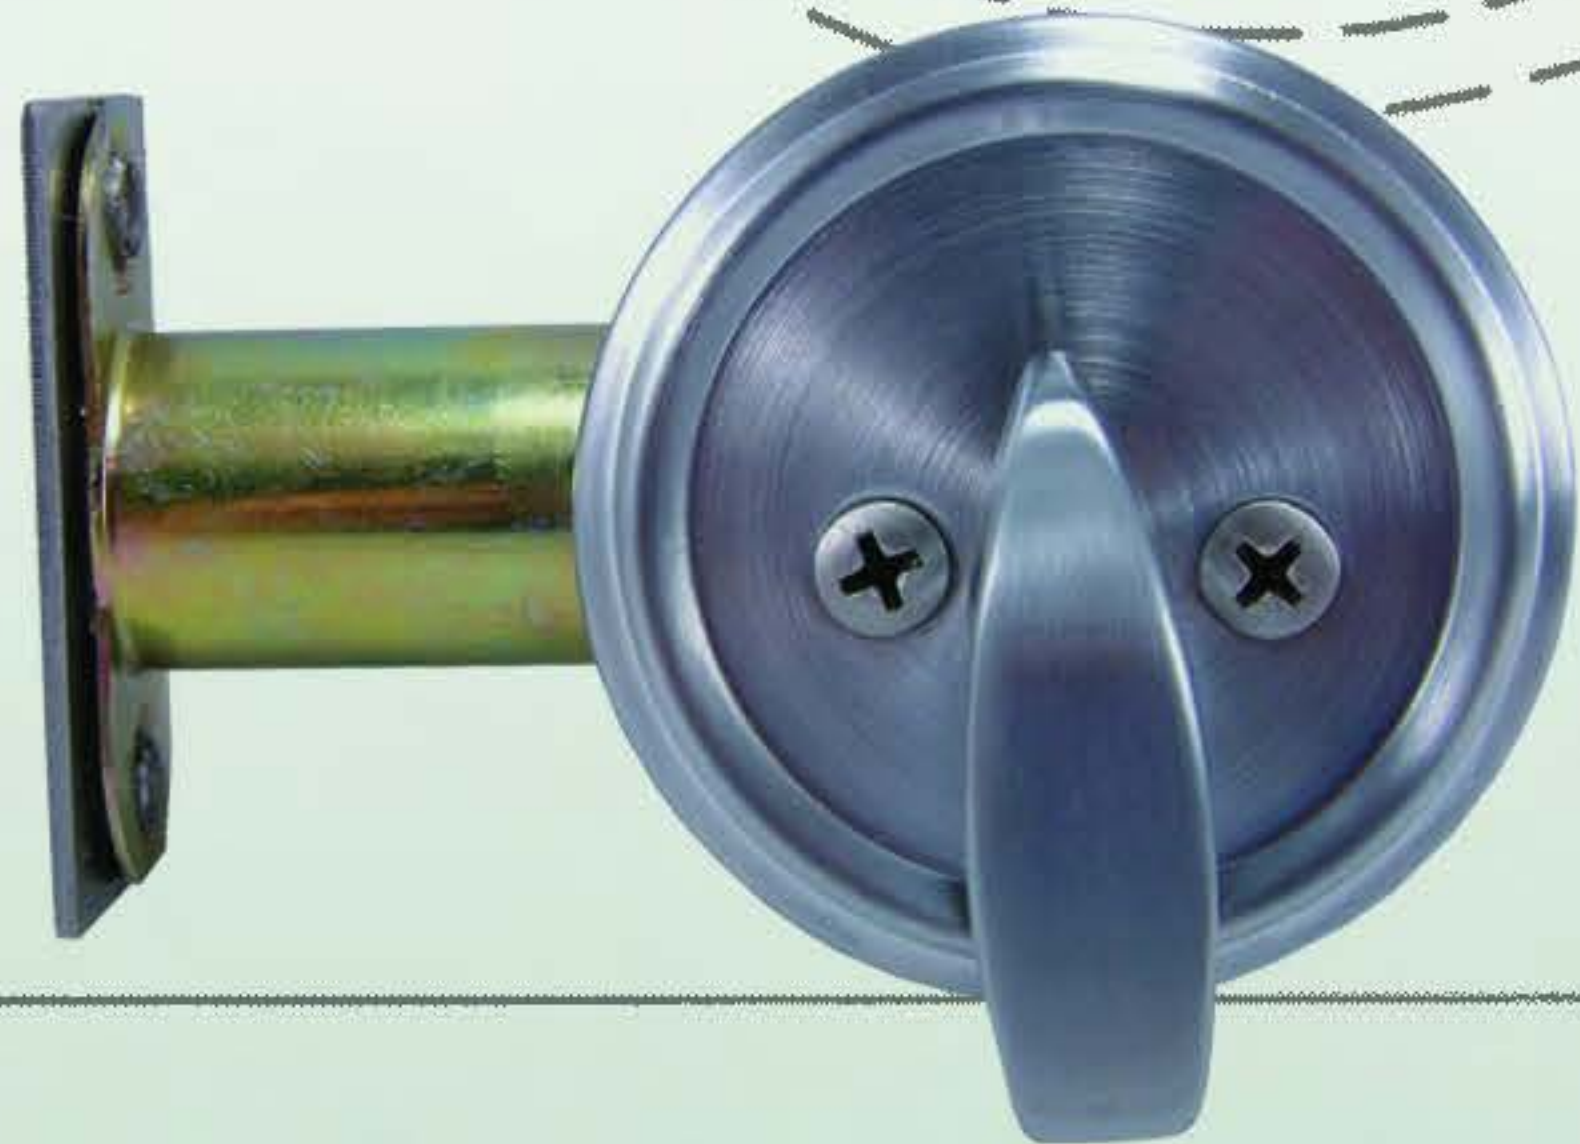

**2" ADA Approved Thumb Turn
with 1/8" Steel Mounting Plate**

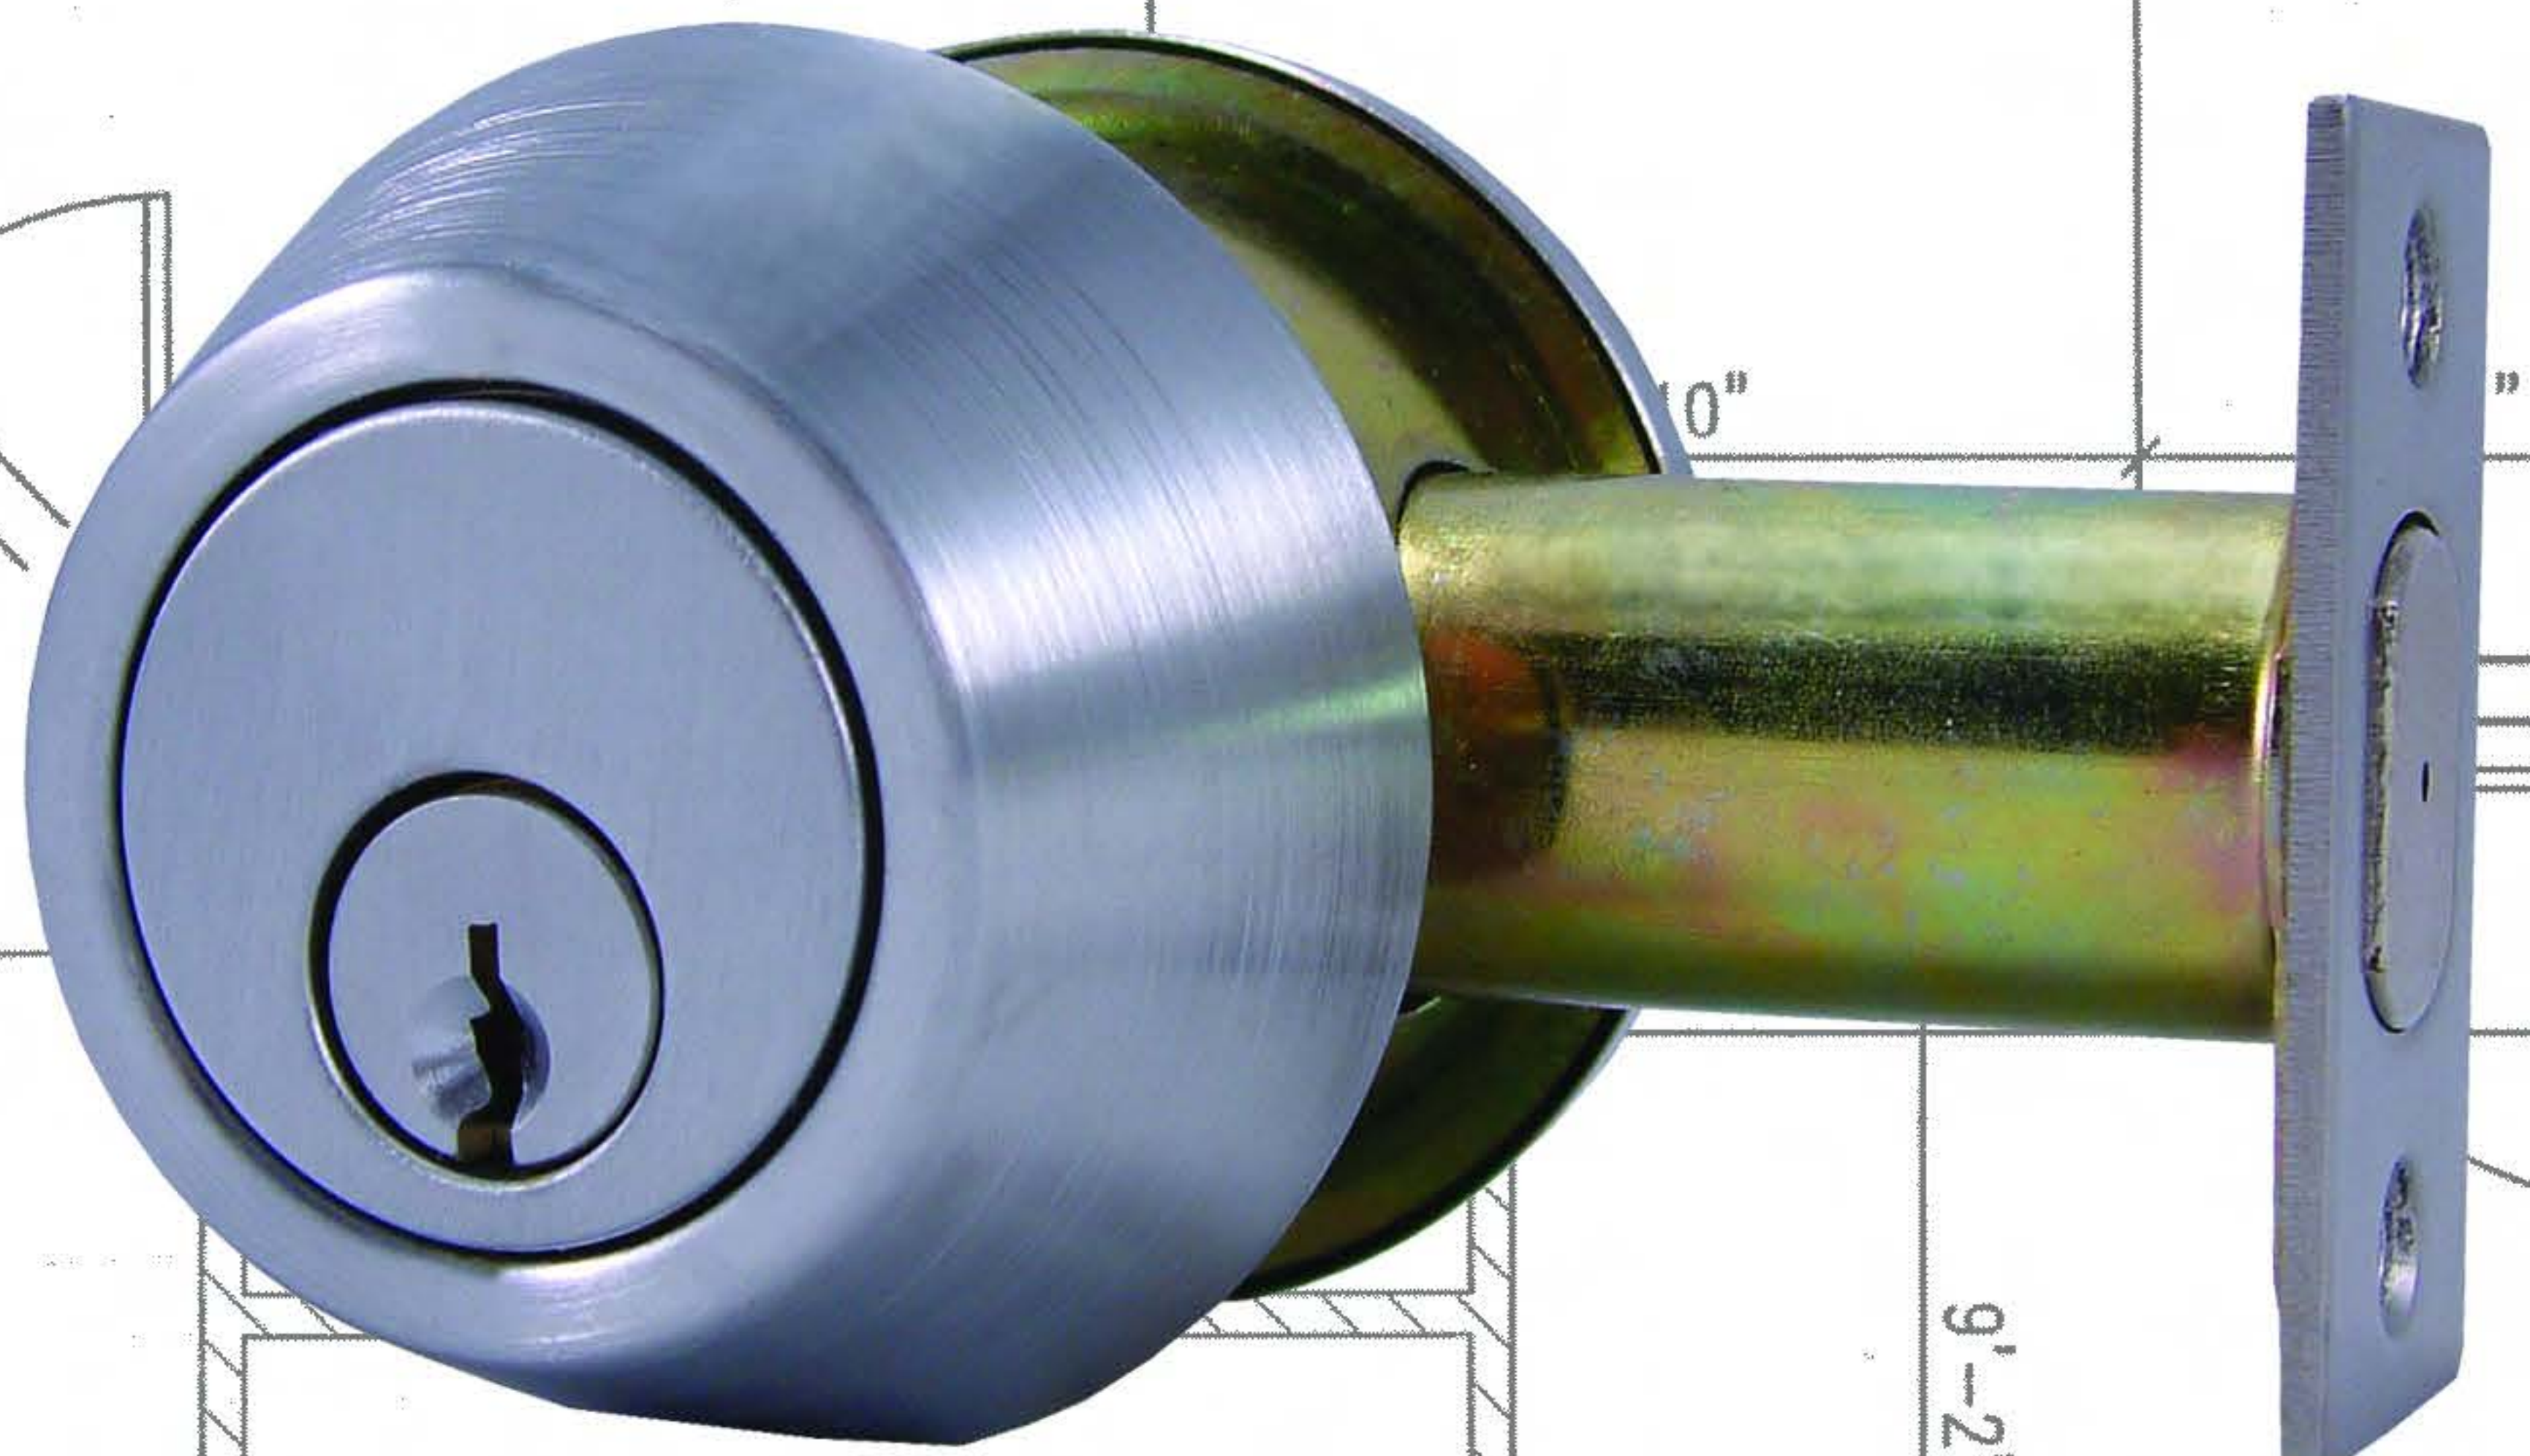

Specifications

- ANSI:** Meets ANSI - A156.2, **Grade 1 Standards**
- UL Listings:** UL Listed for "A" Label 3 Hour Fire Doors
- ADA Compliance:** 2" ADA Thumbturn Meets ADA & ANSI A117.1 accessibility codes
- Lock Chassis:** Steel, Zinc dichromated for Corrosion Resistance
Steel Security Shield included to protect bolt from ice pick attack through door
- Trim:** Free spinning **Solid Steel** cylinder collar resists wrenching and prying
- Handing:** Non-Handed - Completely reversible
- Backset & Latchface:** 2 3/4" fixed backset std. with 1 1/8" x 2 1/4" latchface, 2 3/8" backset available with 1" x 2 1/4" latchface both with self adjusting front for square or beveled doors
- Latchbolt:** Solid Brass with 1" Throw & Anti-Saw Hardened Steel Pin Insert
- Cylinder Options:** 6 Pin Brass, C Kwy, with 2 Keys std, Prepared for Small format IC core (less core)
- Optional Keyways:** 11 popular competitor keyways available with replacement cylinders (extra charge applies)
- Note: Replacement cylinders are supplied loose and not installed in locksets
- Strike:** 1 1/8" x 2 3/4" Square corner, **Wood Frame Reinforcer & 3" screws also included**
- Prep and Thickness:** ANSI A115.2 - 2 1/8" crossbore on doors 1 3/4" thick
- Standard Finishes:** US3 PVD*, US10B, US15, US26 PVD*, US26D (PVD = Lifetime Finish)
- Fasteners:** Combination screws for wood or metal doors & frames
- Warranty:** Limited Lifetime Warranty

