

# I Series Functions & Options



Available Lever Styles



Flat Lever

Stocked in US26D



Curved Lever

Available with Lever Kits



Half Curve Lever

Available with Lever Kits



S-A Lever

Available with Lever Kits



S-B Lever

Available with Lever Kits

Outside / Inside	Series/ Function	Type	ANSI No.	Function Description
	I-75	Passage Single Locking	F95	Deadbolt is thrown or retracted by key in upper deadbolt cylinder from outside or by thumbturn inside. Latchbolt is retracted by rotating lever from either side. Rotating inside lever retracts both deadbolt and latchbolt simultaneously.
	I-82	Entry Double Locking	F97	Deadbolt is thrown or retracted by key in upper deadbolt cylinder from outside or by thumbturn inside. Deadlatch is retracted by key in outside lever when locked by pushing turn button in inside lever. Outside lever may be fixed in locked position by pushing and rotating turn button. Rotating inside lever retracts deadbolt and deadlatch simultaneously.

## Stock Finishes


US26D Brushed/Satin Chrome

## Special Order Finishes

US3 PVD\* Bright/Polished Brass  
 US4 Brushed/Satin Brass  
 US5 Antique Brass  
 US10B Oil Rubbed Bronze  
 US15 Brushed/Satin Nickel  
 US26 PVD\* Bright/Polished Chrome

\*PVD Lifetime Finish Standard on US3 and US26 finishes.  
 PVD = Physical Vapor Deposition

\*\*Special order finishes require 12 week leadtime

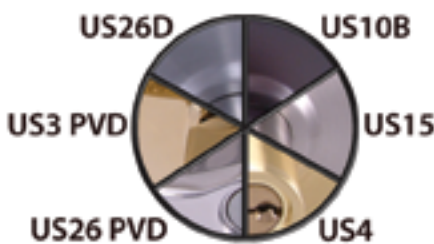

## How to Order

Series    Function    Lever Design    Finish    Handing (if required)  
 I    —    82    —    F    —    US26D    —    RH

Note: Special order levers and finishes have a 12 week leadtime & \$5 net add.  
 S-A and S-B levers are handed please specify right or left hand.

## Lever Abbreviations

Flat= F  
 Curved = C  
 Half Curve = H  
 S-A = S-A  
 S-B = S-B